



合力

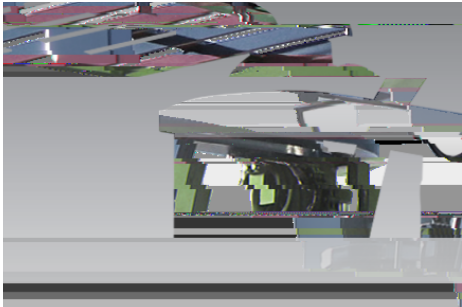

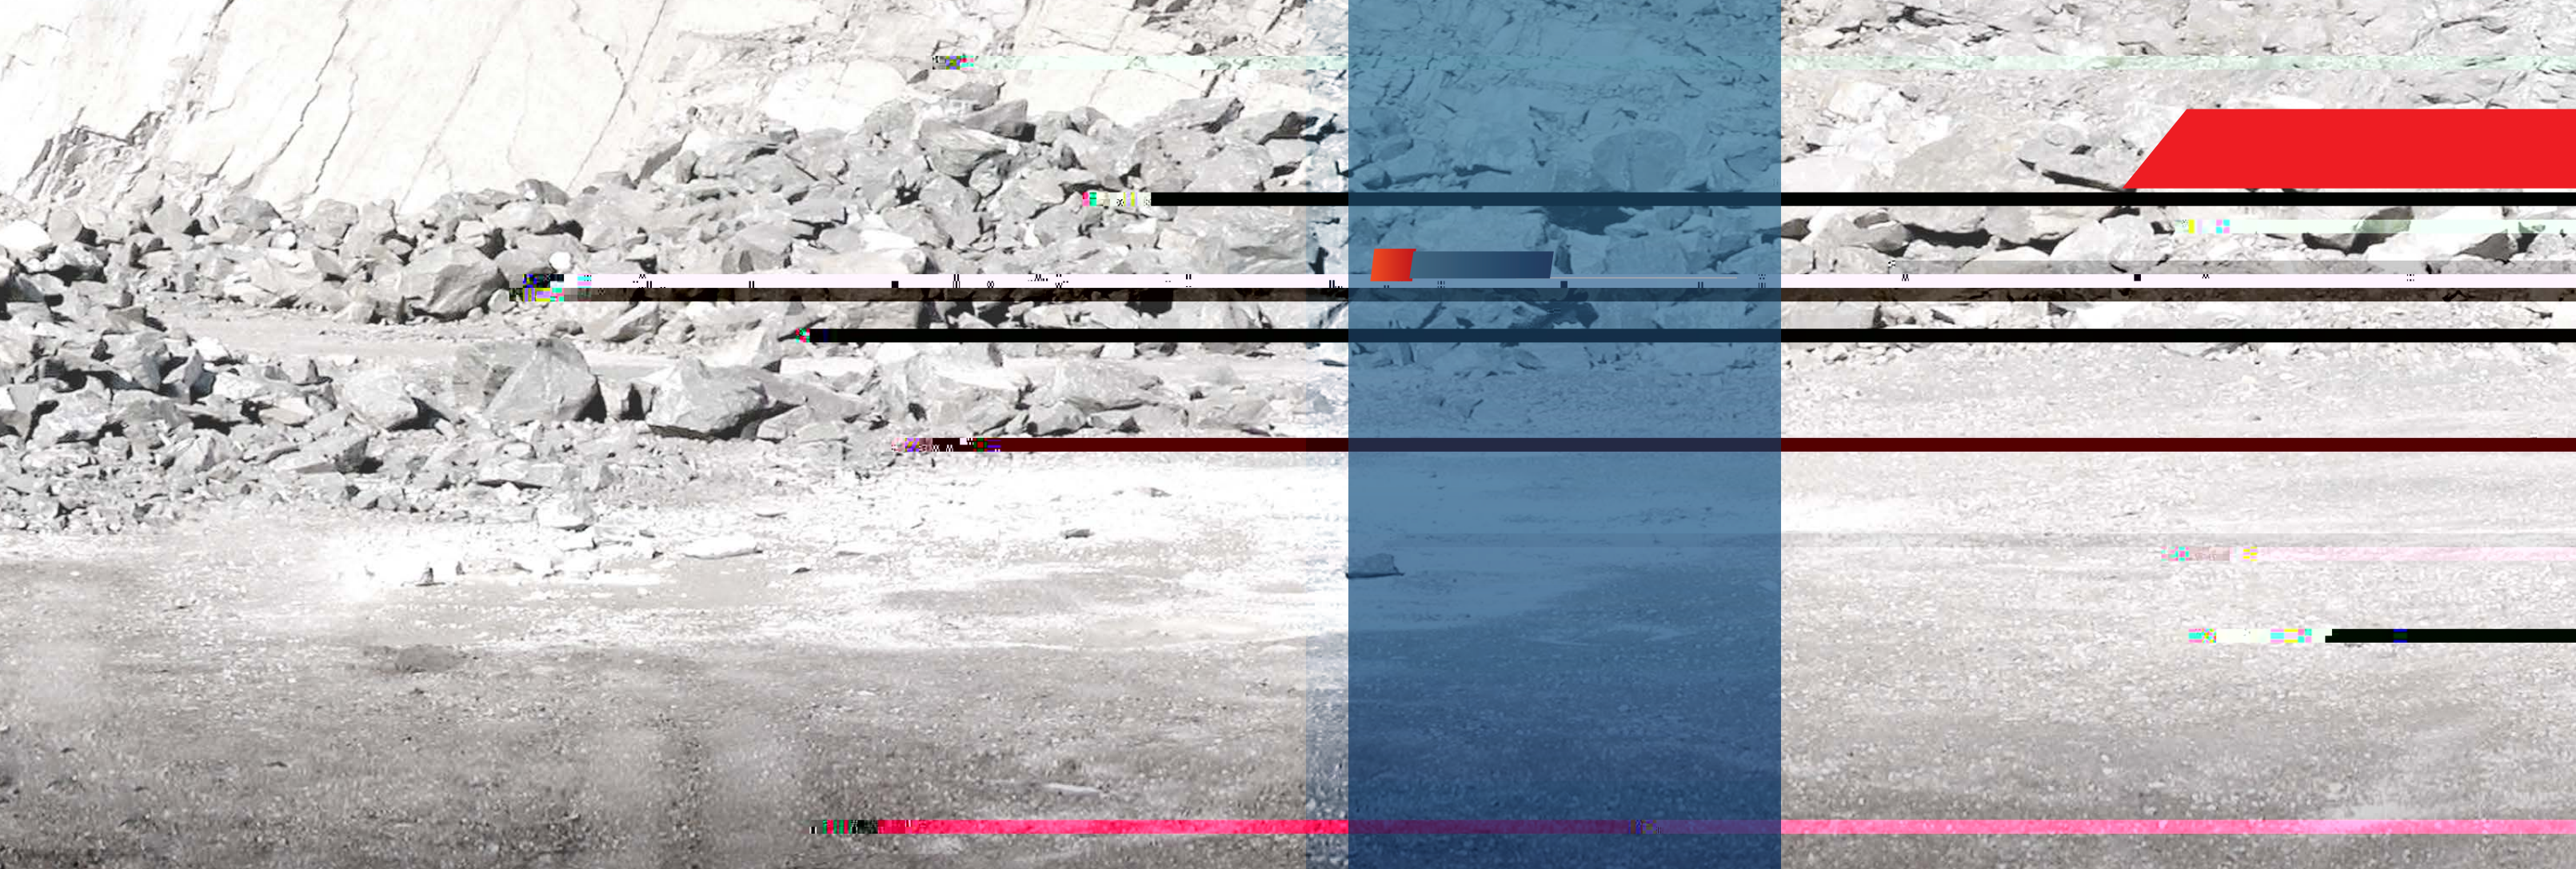

1.01						
1.02					CPC35	
1.03			kg		3500	
1.04			mm		500	
1.05						
1.06						
2.01			H	mm	3000	
2.02			H1	mm	2120	
2.03			H2	mm	4217	
2.04			H3	mm	160	
2.05			H4	mm	2140	
2.06			H5	mm	135	
2.07			H6	mm	1050	
2.08			H9	mm	310	
2.09	/		(L/L)	mm	4166/2946	
2.10			L1	mm	1900	
2.11			L2	mm	484	
2.12			L3	mm	562	
2.13			W1	mm	1225	
2.14	/		W3/W2	mm	1000/970	
2.15		/	W5	mm	1060/250	
2.16			r	mm	2500	
2.17	/		α/β	deg.	10°/10°	
2.18			(L4xWxT)	mm	1220 × 125 × 50	
2.19			Ast	mm	3134	
3.01	/		/	km/h	22/23	
3.02				%	22	
3.03	/		/	kN	19/15	
3.04	/		/	mm/s	400/420	
3.05	/		/	mm/s	450/460	
4.01				kg	4800	
5.01	X=	/			2X/2	
5.02	/					
5.03	/				28 × 9-15-14PR/6.5-10-10PR	
5.04					-	
5.05					-	
6.01	/			V/Ah	12/80	
6.02	/	/			V29-50V42 493VP	
6.03	/			kW/rpm	36.8/2500	
6.04	/			Nm/rpm	170/1800	
6.05	-	×	/	/L	4-93 × 105/2.85	
6.06				L	70	
6.07						
6.08					2- 2	
M300	3000	3500	500mm KG	36.8/2500	2120	4800 10/10